



- Real Wood Frames – Stain or Paint
- Wide Range of Hardwood & Softwood Veneer
- Single & Pairs
- Sidelights, Transom & Borrowed Lites
- Communicating Frames
- Intertek Certified
- Meets USA & Canadian Standards
- Double or Single Rabbet
- Custom Sizes and Profiles
- Positive or Neutral Pressure
- Full CNC Machining Available
- Factory Finishing – Clear, Stain, Paint

Multi-Family | High Rise Residential | Hospitality Projects | Office/Tenant Improvement | Sports Arenas | Hospital | Institutional

SR490



90 Minute
Single Rabbet

DR490



90 Minute
Double Rabbet

SRK490



90 Minute
Single Rabbet
With Kerf

SRK445



45 Minute
Single Rabbet

DR445



Double Rabbeted
Combo Jamb

ADDRESS
2077 Main Street
PO Box 528
Lynden, WA 98264

PHONE
360.592.6090
FAX
360.255.5784

EMAIL
customerservice@victorymillwork.com
WEBSITE
www.victorymillwork.com

45-, 60- & 90-MINUTE FIRE RATED FRAMES







Fire Rated door frames are available with 45-, 60- or 90-minute label to maintain the synergy of the project without compromising design.

- Fire rated door frames are manufactured with an unlimited assortment of hardwood and softwood veneers, as well as high pressure laminates to match the doors & millwork.
- The frames' unique design allows them to achieve fire ratings with both neutral and positive pressure testing.
- Our patented frame design incorporates intumescent material into the frame itself, eliminating the need for it to be built into the doors.

SPECIFICATIONS

- Wall Thickness: 4-1/2" minimum; no maximum
- Single Swing: 4/0 x 9/0 maximum
- Pairs: 8/0 x 8/0 maximum (mfg. with Tectonite)
- Jamb Thickness: 7/8" - up to a 90" Door Size, 1-5/8" - over 8/0

45-, 60- & 90-MINUTE DOOR JAMB DETAILS

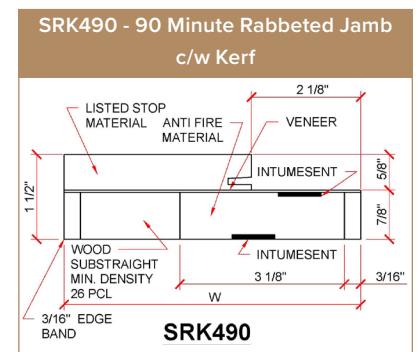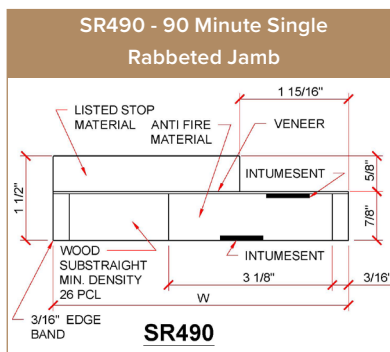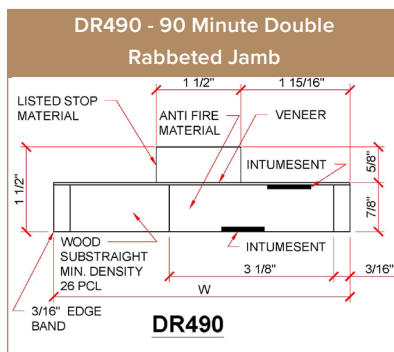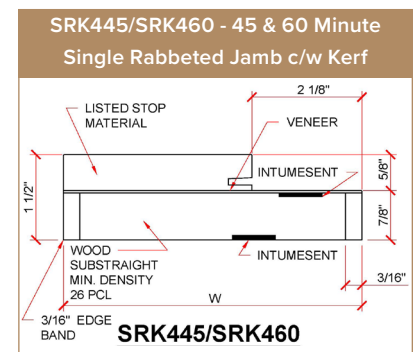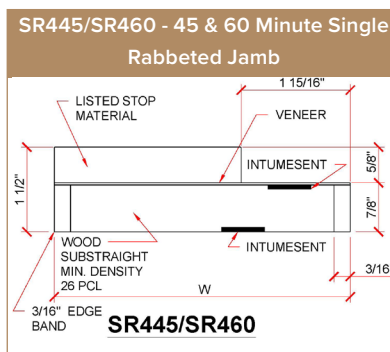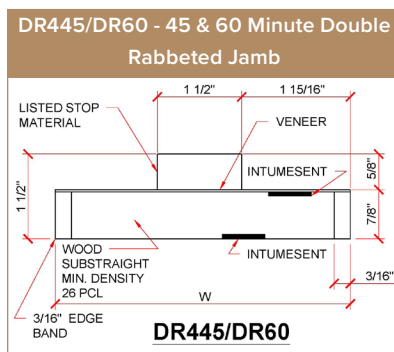

ADDRESS
2077 Main Street
PO Box 528
Lynden, WA 98264

PHONE
360.592.6090
FAX
360.255.5784

EMAIL
customerservice@victorymillwork.com
WEBSITE
www.victorymillwork.com